



LAMIERE GRECATE PER SOLAI UNI EN 1993-1-3 EGB 210

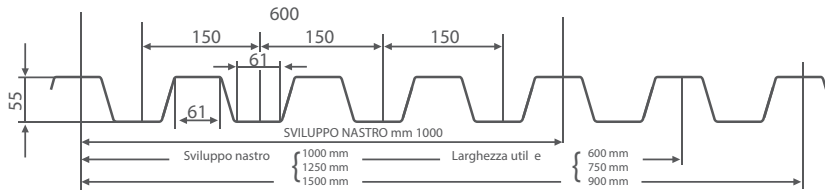

**lung.
6000**

caratteristiche statiche							
spessore mm		0.6	0.7	0.8	1.0	1.2	1.5
peso kg/m ²		7.85	9.15	10.46	13.08	15.70	19.62
peso kg/m lineare	1000	4.71	5.49	6.28	7.85	9.42	11.77
	1250	5.88	6.86	7.85	9.81	11.77	14.17
	1500	7.06	8.24	9.42	11.77	14.13	17.66
J cm ⁴ /m		41.76	51.16	59.89	78.23	96.83	122.74
W cm ³ /m		14.37	18.06	21.59	27.66	33.31	41.31

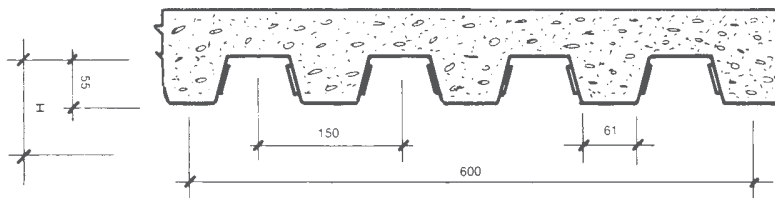


EGB 210/D

**con soletta
collaborante**

caratteristiche statiche					
spessore m m	0.7	0.8	1.0	1.2	1.5
peso kg/m ²	9.15	10.46	13.08	15.70	19.62
peso kg/m lineare	5.49	6.28	7.85	9.42	11.77
J cm ⁴ /m	50.05	59.15	77.63	96.48	122.52
W cm ³ /m	15.38	18.52	25.00	31.81	41.22

**lung.
6000**

LAMIERE GRECATE PER COPERTURE PARETI TIPO EGB 401

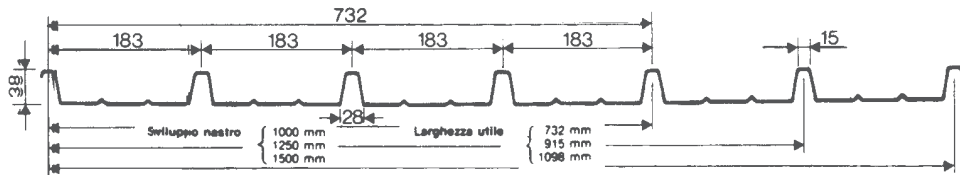


caratteristiche statiche					
spessore mm		0.6	0.7	0.8	1.0
peso kg/m ²		6.42	7.49	8.57	10.72
peso kg/m lineare	1000	4.71	5.49	6.28	7.85
	1250	5.88	6.86	7.85	9.81
	1500	7.06	8.24	9.42	11.77
J cm ⁴ /m		13.79	16.04	18.31	22.83
W cm ³ /m		4.75	5.55	6.36	7.98

**lung.
2000
3000**

LAMIERE GRECATE PER SOLAI COLLABORANTE TIPO EGB 1200/D


**SOLO SU
RICHIESTA**

CON SOLETTA COLLABORANTE

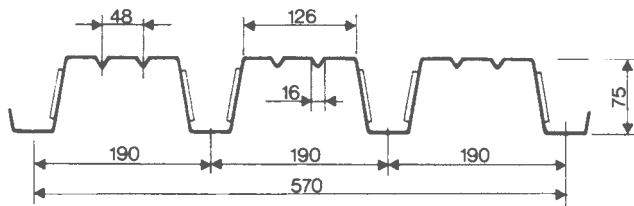

caratteristiche statiche						
spessore m m	0.6	0.7	0.8	1.0	1.2	1.5
peso kg/m ²	8.26	9.64	11.00	13.75	16.50	20.65
peso kg/m lineare	4.71	5.49	6.28	7.85	9.42	11.77
Jx/m ridotto cm ⁴ /m	83.3	100.6	117.30	148.5	179.1	222.30
Wx sup. cm ³ /m	29.5	37.1	44.1	57.5	70.2	87.2
Wx inf. cm ³ /m	17.8	21.0	24.2	30.2	36.2	44.9

LAMIERE ZINCATE ONDULATE

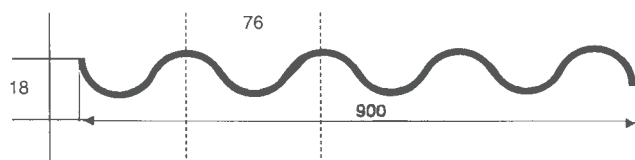

lungh. 2000

spessore m m	0.25	0.30	0.40	0.50	0.60	0.80	1.00
peso kg/m ²	2.14	2.73	3.52	4.30	5.10	6.65	8.25

CEST
CENTRO SIDERURGICO PUGLIESE