


LAMIERE STRIATE

UNI 3151

h = altezza striatura
 Per spessori < 3 mm : 1,00 < h < 2,00 mm
 Per spessori ≥ 3 mm : h secondo norma
 Superficie in rilievo : ≥ 30 %

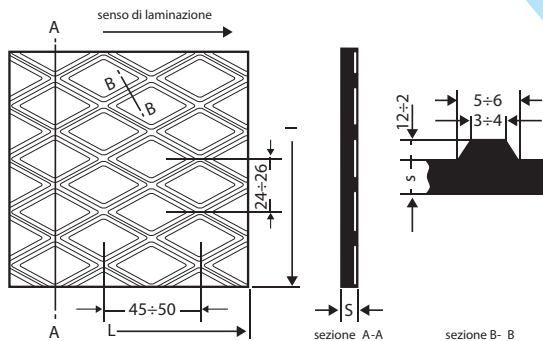


spessore mm	peso kg/m ²	dimensioni in mm				
		1000 x 2000	1000 x 3000	1250 x 2500	1500 x 3000	1500 x 6000
		peso in kg				
* 2.5	22.2	45		69	100	
3	28.6	57.2	85.8	89.4	128.7	257.4
4	36.5	73	109.5	114	164.3	328.5
5	44.3	88.6	132.9	138.5	199.4	398.7
6	52.1	104.2	156.3	163	234.5	486.9
8	67.8	135.6	203.4	211.9	305.1	610.2
10	83.6	167.2	250.8	261.2	376.2	752.4
12	99.1	198.2	297.3	309.7	446	891.9

* non unificato

LAMIERE BUGNATE

UNI 4630

h = altezza bugna
 Per spessori < 3 mm : 1,00 < h < 2,00 mm
 Per spessori ≥ 3 mm : h secondo norma
 Superficie in rilievo : ≥ 30 %



spessore mm	peso kg/m ²	dimensioni in mm		
		1000 x 2000	2500 x 1250	3000 x 1500
		peso in kg		
3	26.05	52.1	81.1	117
4	33.95	67.9	106	153
5	41.75	83.5	130.1	187.6
6	49.60	99.2	154	223
8	65.30	130.6	204	284
10	81.10	162.2	250	365

